DART SERVICE INSTRUCTION TO AMEND INSTALLATION INSTRUCTIONS II135-21 REV. J

TO AMEND INSTALLATION INSTRUCTIONS II135-21 REV. J
AND INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA135-21 REV. F
OR LATER APPROVED REVISIONS

REF. TCCA STC: SH21-29 REF. FAA STC: SR02307LA REF. EASA STC: 10031793 REF. AFAC STC: IA-751/2021

1.0 PURPOSE

The purpose of this Dart Service Instruction (DSI) is to allow customers to replace the rivets that are used to install the P/N 647.1915 Support Angles as part of the 647.7300 series cable cutter kits.

2.0 PROCEDURE

Step 7 from Section 4.0 of II135-21 cannot be accomplished due interference from existing equipment installed on the aircraft. Also, there is not enough clearance to insert the required tool to drive some of the rivets in place.

With reference to Figure 1 of this DSI, it is acceptable to install the Support Angle P/N 647.1915 (F/N 44) and Gusset P/Ns 647.1814/.1815 (F/N 39 and 40) using shear Hi-Loks and Hi-Lok Collars in lieu of 601.1915 Rivets (F/N 89). Figure 1 and the tables on page 2 this DSI clarify changes to parts shown in Figure 22 and Table 10 of II135-21. The changes are circled in red.

3.0 WEIGHT AND BALANCE

This modification has negligible effect on weight and balance.

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

D. SHEPHERD (DE # 02)

DATE: __ CERT. NO.: __ ISSUE NO.:

22.04.28 SH21-29 APPROVED

Α	NEW ISS	SUE (Ref ECR	391) SAD	22.04.28			
REV.			DESCRIPTION BY	DATE			
DESIGN		SAD	DART AEROSPACE LTD				
DRAWN		SAD	HAWKESBURY, ONTARIO, CANADA				
CHECKED		MB	DRAWING NO.	REV. A			
MFG. APPR.		N/A	DSI 9884 s _F	HEET 1 OF 2			
APPRO	OVED	CP _	TITLE	SCALE			
DE APPR.		DS 🚽	REPLACEMENT FASTENER	S NTS			
DATE 22.04.28			COPYRIGHT © 2022 BY DART AEROSPACE LTD. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT				

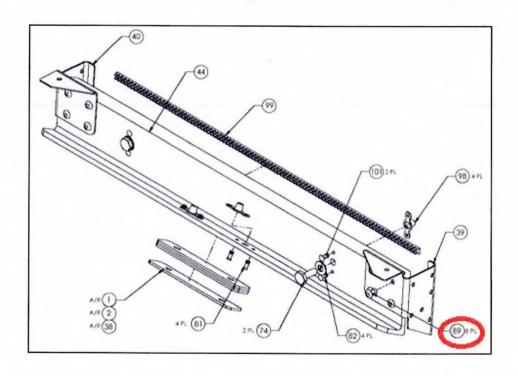


Figure 1 - Support Angle Installations
(Ref. Figure 22 of Installation Instructions II135-21)

IS:

F/N	Qty (7332)	P/N	Description
89	8	HL18PB5-3* HL70-5*	Hi-Lok Hi-Lok Collar

^{*:} Acceptable alternate P/Ns: HL18PB6-3 (Hi-Lok) and HL70-6 (Hi-Lok Collar)

WAS:

F/N	Qty (7332)	P/N	Description	
89	8	601.1915	Rivet (CR3213-4-4)	

(Ref. Table 10 of Installation Instructions II135-21)

	DESIGN	SAD	DART AEROSPACE LTD	SPACELID	
APPROVED	DRAWN	SAD	HAWKESBURY, ONTARIO, CANADA		
	CHECKED	MB		REV. A	
	MFG. APPR.	N/A	DSI 9884 SHEET 2	OF 2	
	APPROVED	CP /	TITLE	CALE	
	DE APPR.	DS	REPLACEMENT FASTENERS	NTS	
	DATE 22.0	4.28	COPYRIGHT © 2022 BY DART AEROSPACE LTD. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION TH NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ACT OTHER PERSON WIT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		